

Model: RPIC-1, 2, 3 Vibration Isolation Curb

Standard Construction:


Roof curb with integral 1" to 3" deflection isolation. External spring access. Options include seismic calculations, wood nailers, flex duct supports, sound attenuation packages, increased heights, and pitched configurations. Roof curb and isolation are rated to 0.3G at standard height and construction, with a maximum wind load of 120 mph. Shipped in one piece up to commercial carrier limitations.

Added Options (When Required):

RPI Job #: -

Project: _____

Architect: _____




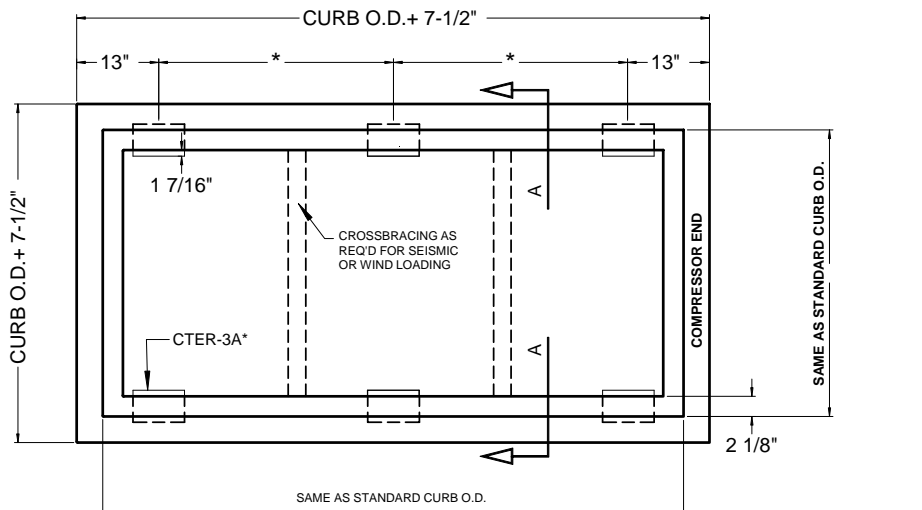


Deflection

- 1"
- 2"
- 3"

Options

- DUCT SUPPORTS
- SOUND PANEL SUPPORTS
- EXTERIOR INSULATION

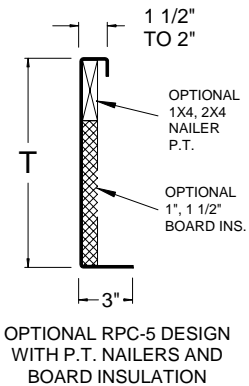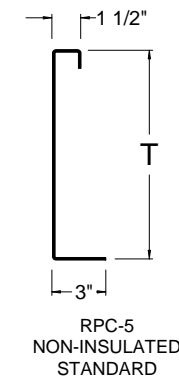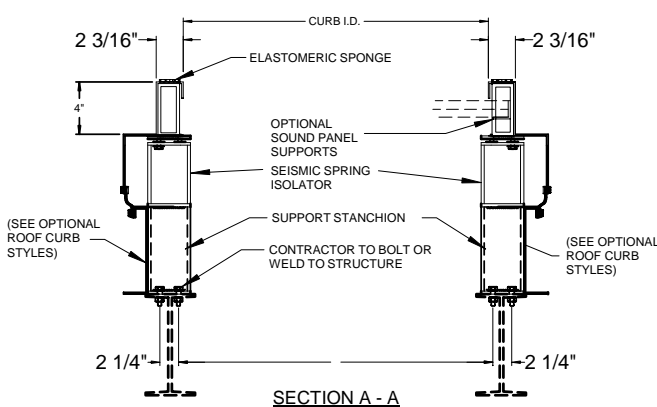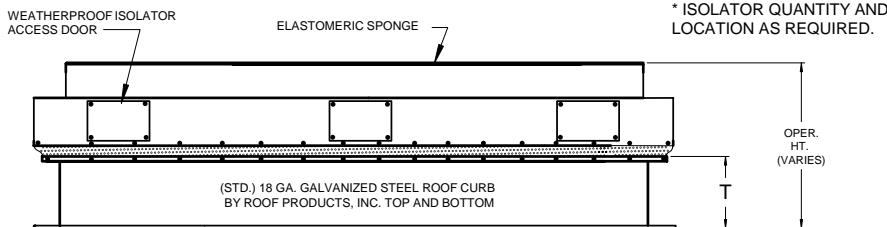

Qty.	CURB I.D.	CURB O.D.	T	Tag: