

Model: RPIR-1, 2, 3 Vibration Isolation Rail

Standard Construction:


Extruded Aluminum rails formed to fit curb and equipment with a flexible air and weather seal. Incorporating type SW spring isolators sized for 1", 2" or 3" static deflection. (Rails are shipped in one piece up to 8'0" x 27'0")

Added Options (When Required):

RPI Job #: -

Project: _____

Architect: _____

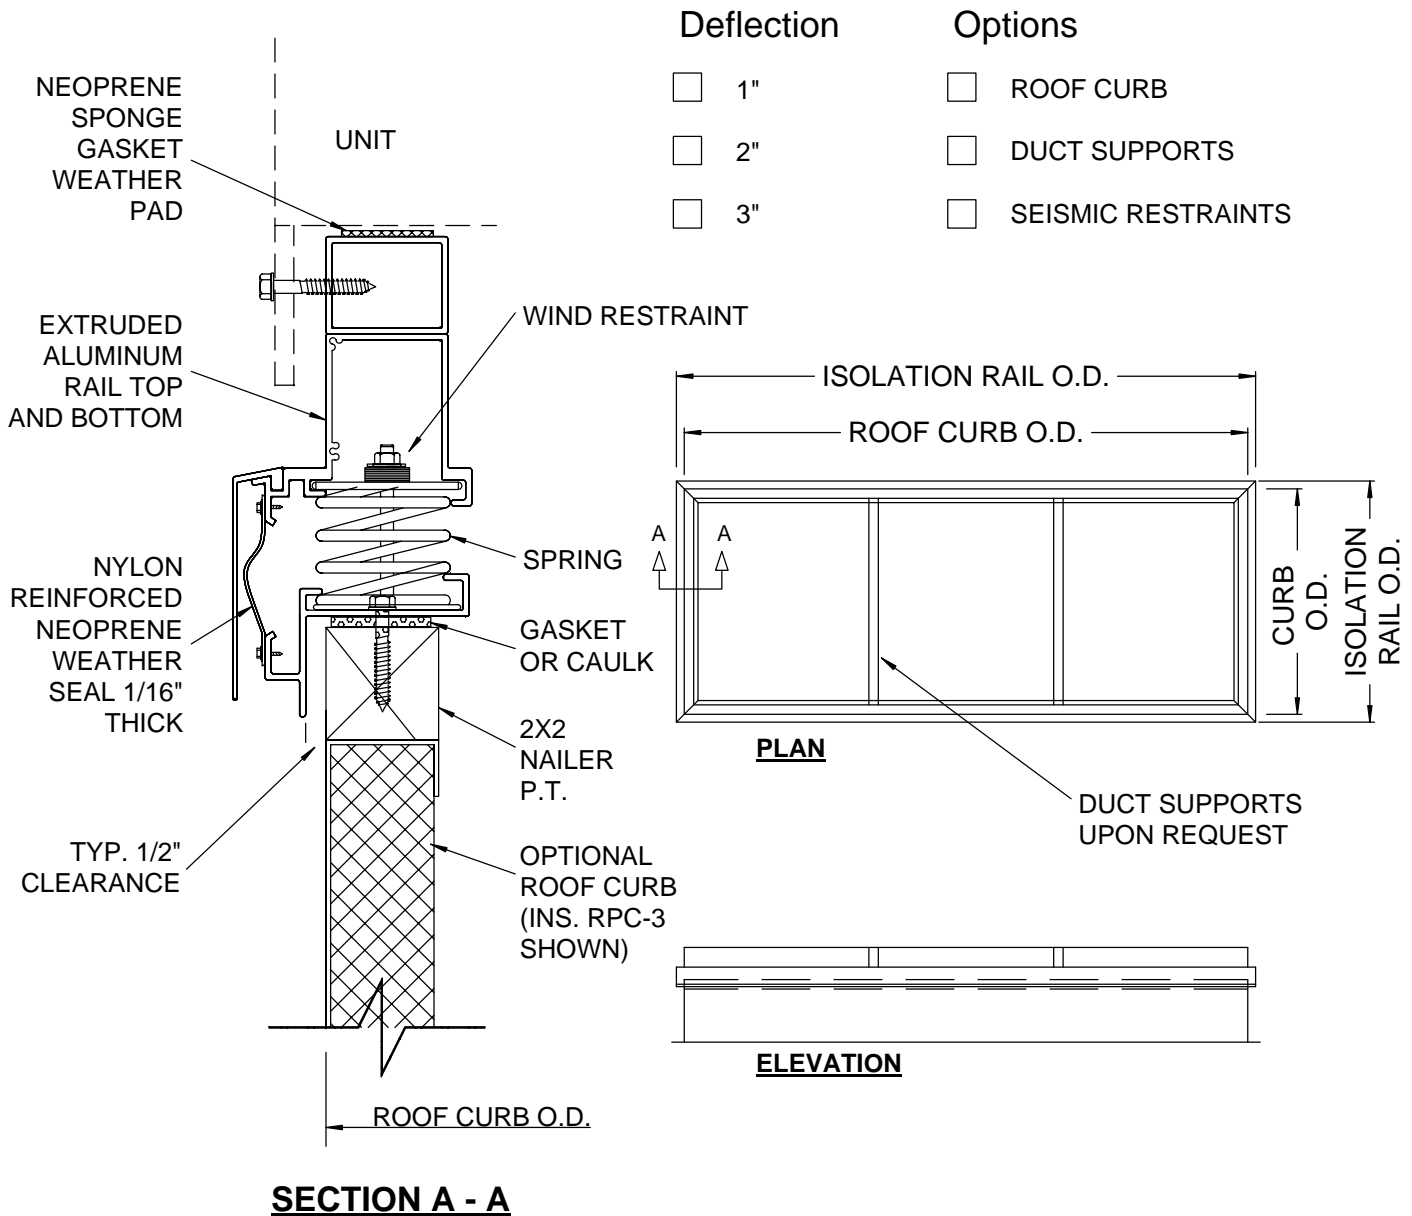

QTY.	CURB TOP I.D.	CURB TOP O.D.	TAG: