

Model: RPMB-10

Added Options:

Metal Building Roof Curb (2 Piece Construction) with Integral Corrugations (Low Side) for Under/Over Panels at Existing or New Construction.

Standard Construction:

Two piece curb; insulated or non-insulated; 8" minimum height; 18 gauge galvalume steel shell and base plate; corners mitered and welded watertight; welds are micro-sealed and prime painted after fabrication; water diverter panel; integral panel corrugations (low side only).

- 1.
- 2.
- 3.
- 4.
- 5.



PROJECT: _____

RPI JOB# _____


-

Match Roof Panel: _____


No. of Ribs over Panel each curb: _____

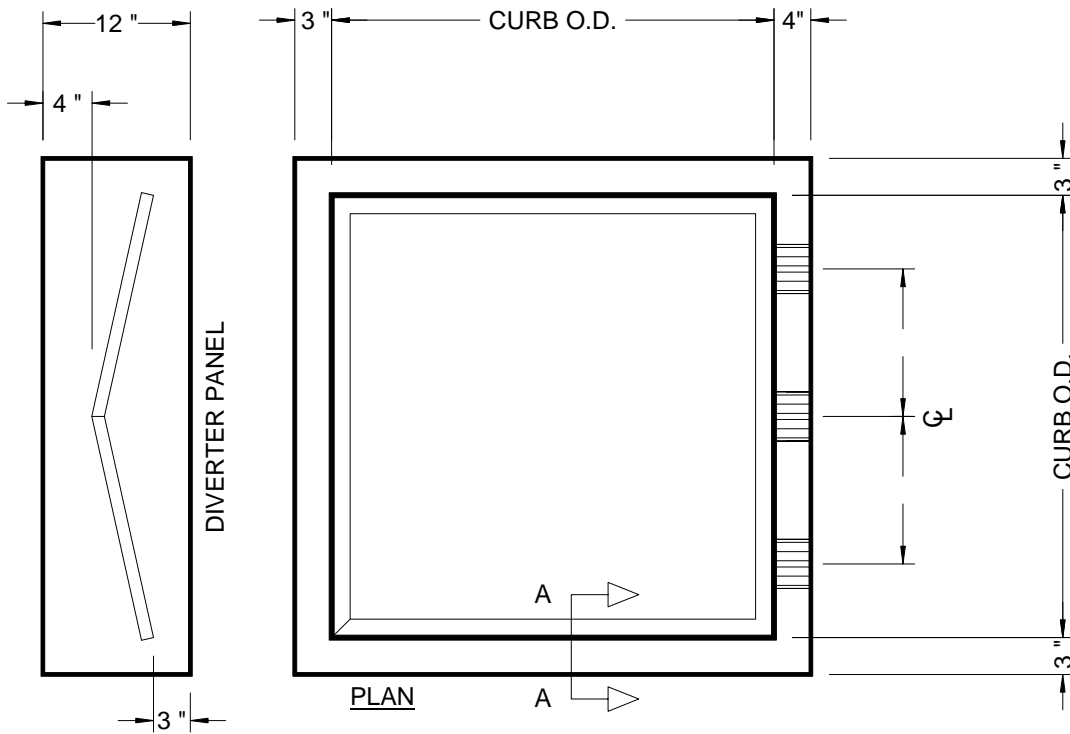


Check Box for Ins. or Non-ins.



SECTION A-A
 INSULATED



SECTION A-A
 NON-INSULATED

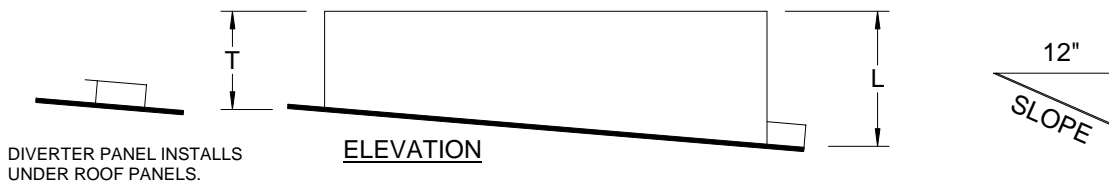

| QTY. | I.D. | O.D. | T | L | TAG: |
|------|------|------|---|---|------|
| | | | | | |