

## Model: RPMB-4

Metal Building Roof Curb (2 piece Construction) with Integral Corrugations for Under/Over Panels at Existing or New Construction.

Added Options:

### Standard Construction:

Two piece curb; insulated or non-insulated; 8" minimum height; 18 gauge Galvalume steel shell and base plate; corners mitered and welded watertight; welds are micro-sealed and prime painted after fabrication; water diverter panel; integral panel corrugations.


- 1.
- 2.
- 3.
- 4.
- 5.

Project: \_\_\_\_\_



RPI JOB#: -

Match Roof Panel: \_\_\_\_\_


No. of Ribs under Panel each curb: \_\_\_\_\_




No. of Ribs over Panel each curb: \_\_\_\_\_

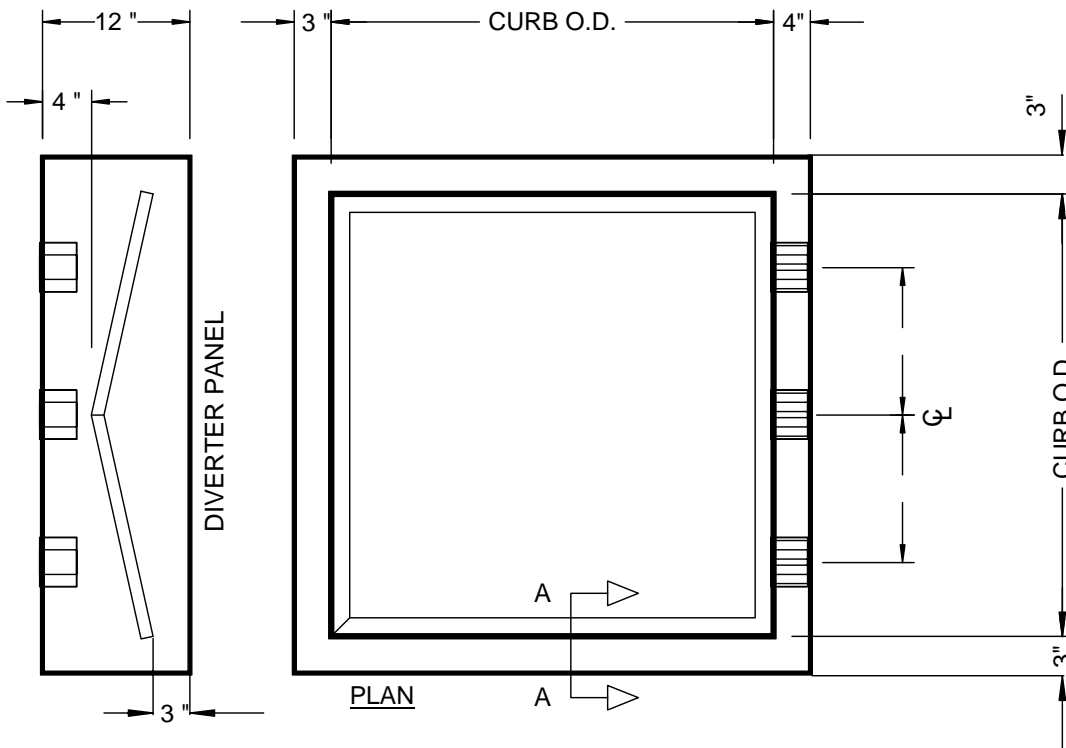


Check Box for Ins. or Non-ins.



SECTION A-A  
 INSULATED



SECTION A-A  
 NON-INSULATED

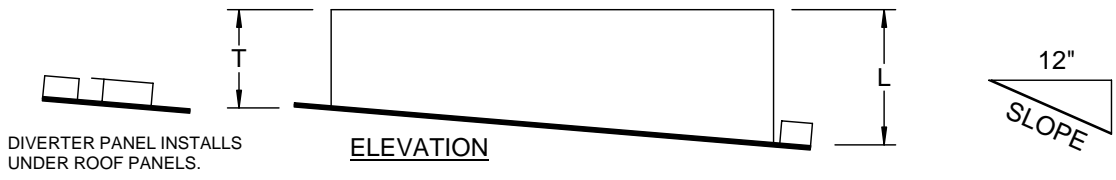

DIVERTER PANEL INSTALLS UNDER ROOF PANELS.

QTY.	I.D.	O.D.	T	L	TAG: