

## Model: RPMB-9

Metal Building Roof Curb with Integral Corrugations (Low Side) for Under/Over Panels at New Construction.

## Added Options:

### Standard Construction:

One piece curb; insulated or non-insulated; 8" minimum height; 18 gauge galvalume steel shell and base plate; corners mitered and welded watertight; welds are micro-sealed and prime painted after fabrication; integral water diverter; integral panel corrugations (low side only).

- 1.
- 2.
- 3.
- 4.
- 5.



PROJECT: \_\_\_\_\_

RPI JOB# \_\_\_\_\_


-

Match Roof Panel: \_\_\_\_\_


No. of Ribs over  
Panel each curb: \_\_\_\_\_

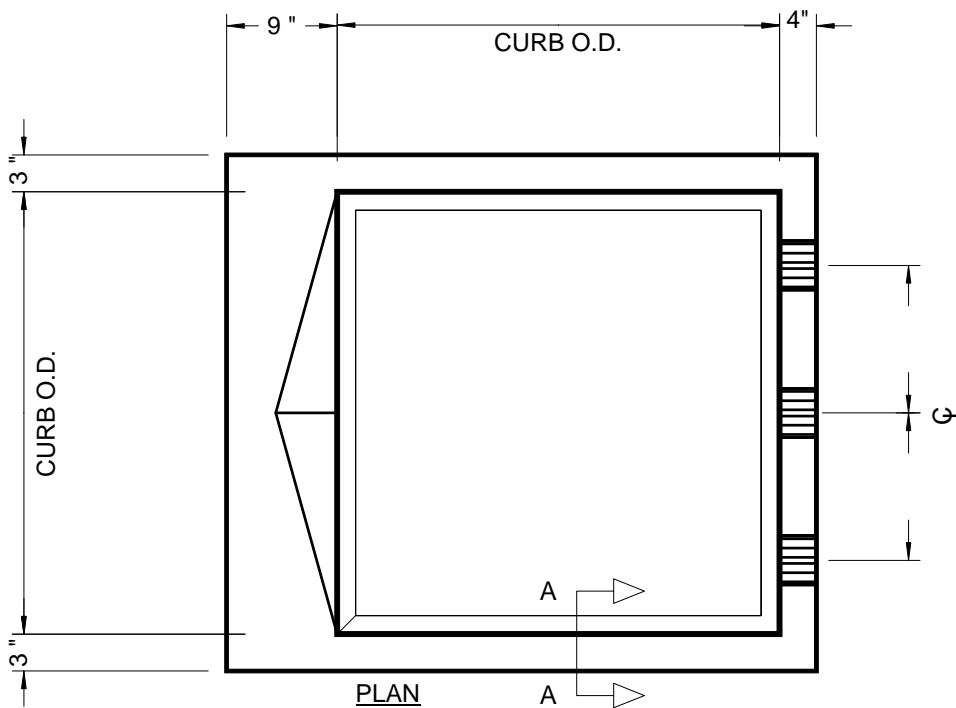



Check Box for  
Ins. or Non-ins.



SECTION A-A  
 INSULATED



SECTION A-A  
 NON-INSULATED

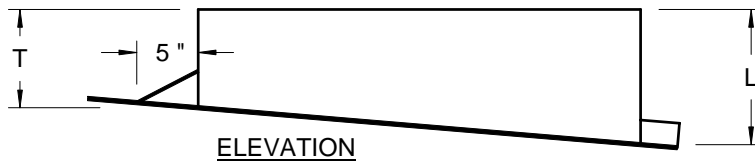

QTY.	I.D.	O.D.	T	L	TAG: